

230V ac Relay Unit



CMIO353 - Relay Unit

Overview

An extensive range of interfaces are available to support the Cooper range of control panels, providing solutions for most design requirements.

The 230V ac relay unit (CMIO353) enables simple interfacing between the fire system and other equipment such as nurse call systems or access control systems.

The ability of the output unit to switch mains also makes the unit ideal for plant control or mains powered door holders.

The input is monitored for open and short circuits therefore can be used for fire input applications such as monitoring sprinkler flow switches.

Features


- Soft addressed
- Integral short circuit isolator
- Single address
- Mains rated relay unit
- Input monitored for open and short circuits

Benefits

- Quick and simple to install
- No hard addressing required (Plug and play)
- Achieves simplified inter-panel interfacing

Intelligent Addressable - 230V ac Relay Unit - CMIO353

Dimensions

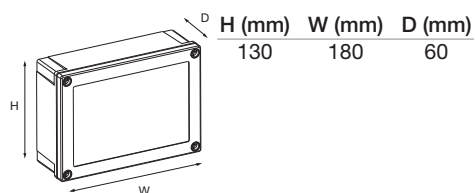


Technical Specification

Code	CMIO353
Description	230V ac relay unit
Standards	EN54 Pt17 & Pt18 2005
Specification	
Operating Voltage	18V dc to 30V dc
Quiescent Current	310µA
Maximum Switching Voltage	230V ac to 250V ac (nominal)
Maximum Switching Current	8A
Environmental	
Operating Temperature	-10°C to +60°C
Humidity (non condensing)	0 to 95% RH
Physical	
Construction	PC/ABS
Dimensions (H x W x D)	130mm x 180mm x 60mm
Weight	0.5kg
Ingress Protection	IP65
Compatibility	
Suitable for use with	Cooper intelligent addressable fire systems
Recommended loops/cable type	Fire Tuff, FP200, MICC

Installation

1. Mains rated input relay is designed for surface fixing.
2. All connections are via heavy duty terminals.
3. Cable entry can be top, bottom or side.
4. Output relay contacts are rated at 230V ac.

Standard Connections

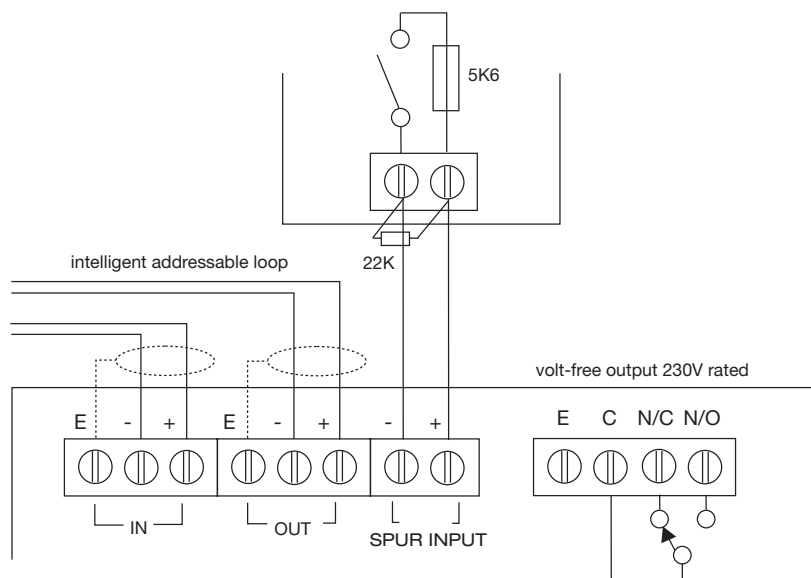

NOTES:

1. Earth (Screen) cable must be connected to its adjacent earth terminal.
2. The end of line resistor must always be fitted, even if input is not used.
3. Input circuit is monitored for wiring open and short circuit.
4. Output relay is a set of changeover volt free-contacts and is not monitored.

Product Codes

Code	Description
CMIO353	230V ac Relay Unit

Eaton's Fire Systems business

Cooper Lighting and Safety Ltd, Wheatley Hall Road, Doncaster, South Yorkshire, DN2 4NB. United Kingdom.

T: +44 (0) 1302 303350 | F: +44 (0) 1302 30332 | E: techsupport@cooperfire.com | W: www.cooperfire.com